
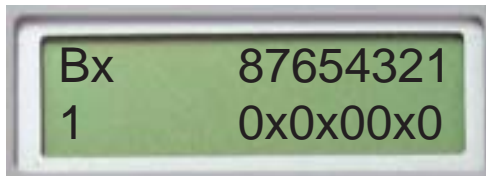
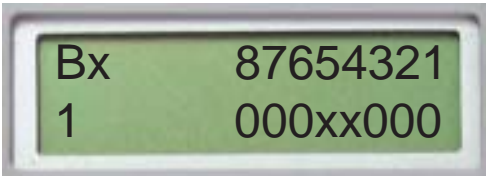


Programmable Timer Switch-LCD (PTS-L)

Main Menu

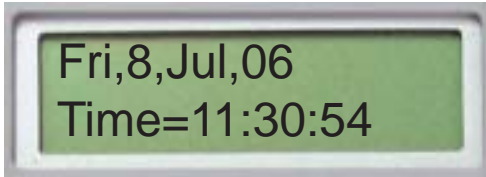


1. Lighting Control Menu

- Press **Enter** or **F4** to enter controlling mode.
- Press + / - to select Box to control.
- Press **1 - 8** to turn **On/Off** circuit 1 - 8 of the selected Box.
- Press **Quit** to back to Main Menu.




2. Date Setting Menu


- Press << >> to select “ **SET DATE** ” menu
- Press Enter

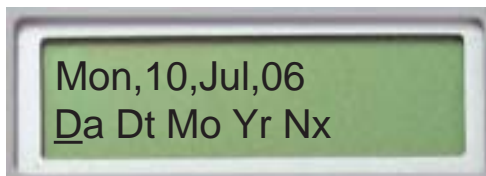


- Press << >> to select “ **DA** ” menu
- Press Enter

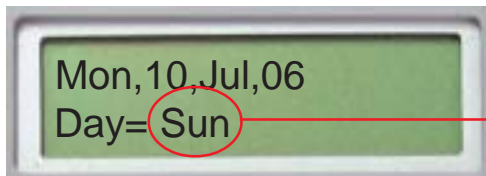


- Press << >> to select “ **Sun, Mon, Tue,Wed, Thu, Fri, Sat** ” menu
- Press Enter
- Ex. Sun

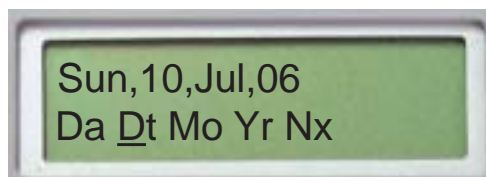


- Press << >> to select “ **DT** ” (Set Date) menu
- Press Enter

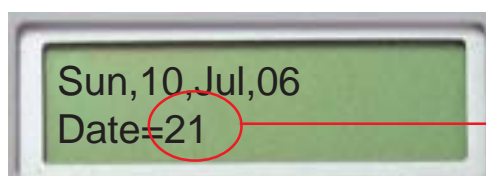


- Enter 2 digit Date (**01 - 31**)
- Press Enter
- Ex. 21

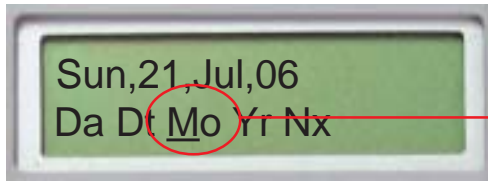


- Press << >> to select “ **MO** ” (Set Month) menu
Press Enter

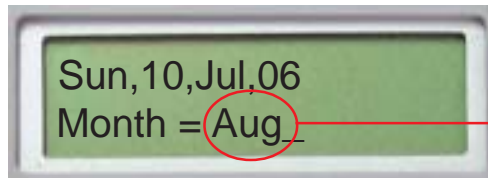


- Press << >> to select “ **Jan...Dec** ” menu
Press Enter
Ex. Aug

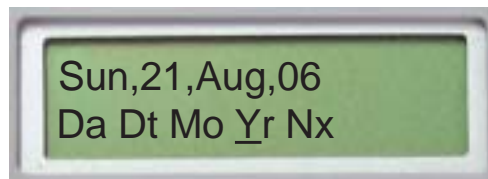


- Press << >> to select “ **Yr** ” (Set Year) menu
Press Enter

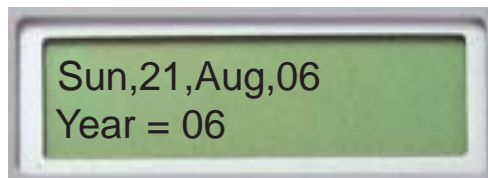

- Enter **2** digit Year
Press Enter
Ex. 06 (2006)

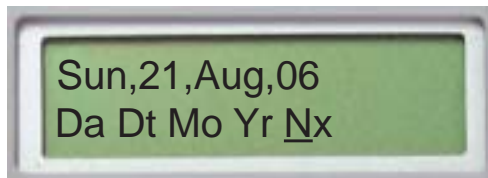


- Press << >> to select “ **Nx** ” (to Save setting)
Press Enter

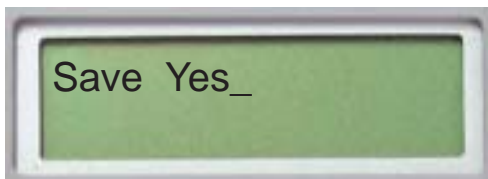

- Press << >> to select “ **Yes** ” or “ **No** ”
to save setting
Press Enter



- If “ **No** ” is selected, will back to “ **Set Date** ” menu

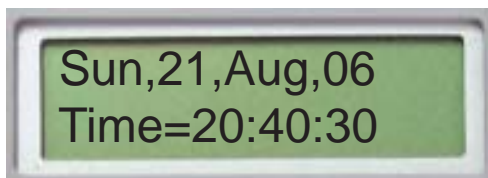


- If “ **Yes** ” is selected, will back to **Main menu**




3. Time Setting Menu


- Press << >> to select " **SET TIME** " menu
Press Enter

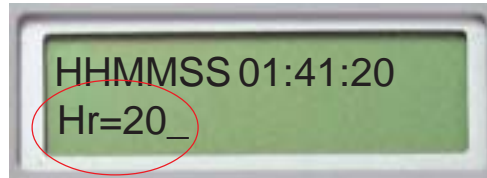


- Enter **2** digit **hour number**
Press Enter Ex. 20

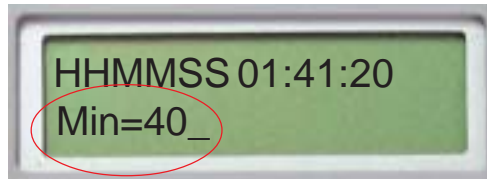

- Enter **2** digit **minute number**
Press Enter Ex. 40

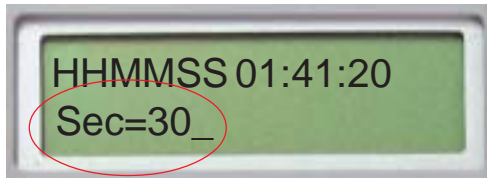

- Enter **2** digit **Second number**
Press Enter Ex. 30

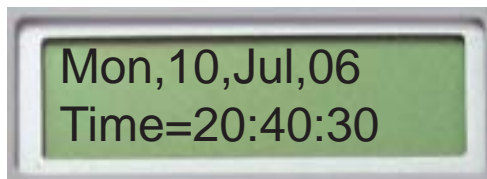

- **Finish Time Setting**, back to Main Menu



4. Program Setting Menu



- Maximum 64 programs can be set


A: Set program from Key Switch

- Press << >> to select “ **SET PROGRAM** ” menu
Press Enter



4.1 Press << >> to select **PROGRAM** Ex. P1

4.2 Press   to select **Box** Ex. B1

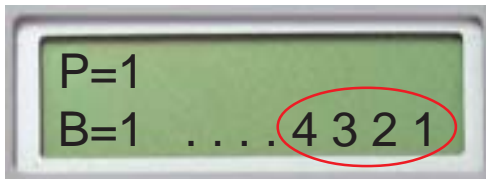


4.3 Press **1 - 8** to select **Circuit (1 - 8)** Ex. 1,2,3,4
Press Enter




4.4 Tm : Time Da : Day
On : On/Off Bnk : Delete program


Press << >> to select “ **Tm** ” (Time)
Press Enter

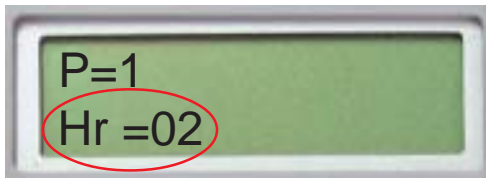


4.4.1 Enter 2 digit hour Ex. 02
Press Enter

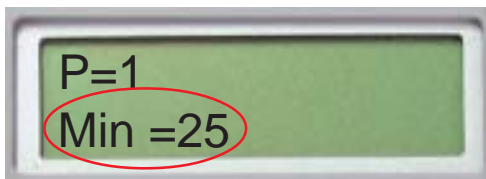


4.4.1.1 Enter 2 digit minute Ex. 25
Press Enter

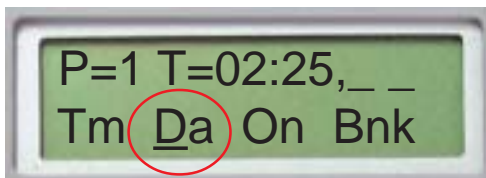


4.4.2 Press << >> to select “ **Da** ” (Day)
Press Enter

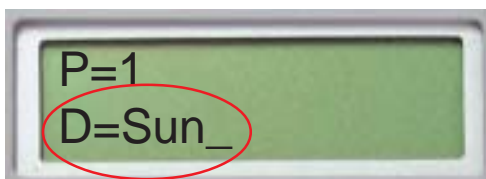


4.4.2.1 Press << >> to select **Day** :
D : All (Every day), M-F (Monday - Friday)
M-S : (Monday - Saturday) Sat (Saturday)
Sun : (Sunday)
Press Enter
Ex. D : Sun (Select Sunday only)

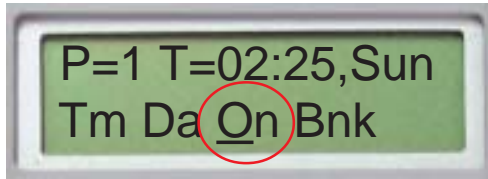


4.4.3 Press << >> to select " On " Press Enter

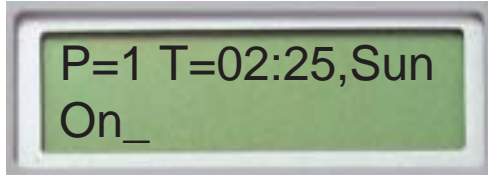

4.4.3.1 Press << >> to select " On " or " Off " Press Enter Ex. select " On "

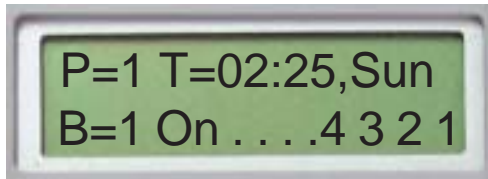

Setting program 1 is done.

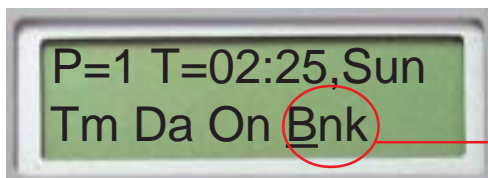


4.5 To erase previous set program Press << >> to select which program to erase Press Enter

4.5.1 Press << >> to select " Bnk " (Blank) Press Enter



4.6 Repeat step 4.1 - 4.5 if more program setting is correction of previous set program is required.

4.7 Press **Quit** to exit

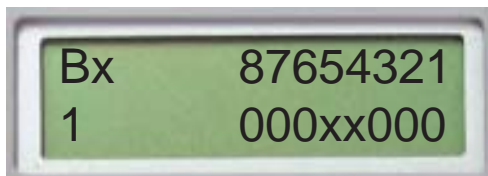


5. Lighting

Press << >> from main menu to select " **Lighting** " Press Enter - See topic 1.) Lighting Control Menu



6. Erase all preset programs

Press << >> to select " **Blank EE** " Press Enter or Press **Quit**

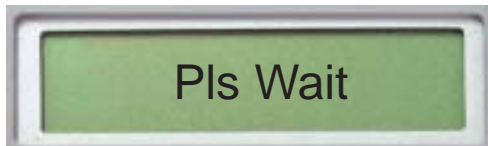


Caution : If Enter is pressed, all preset programs will be erased.



7. Get Box ID

Press << >> to select " **GET ID** " Press Enter

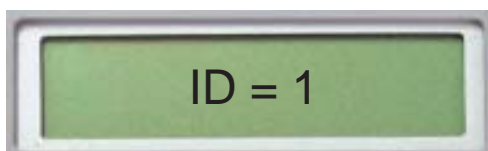

Box ID : which " Programmable Timer Switch " is connected to, will be displayed.

B : Set program by using computer

AILLIGHT '.ocx' software are provided in CD



1. Copy file : **mscomtl.ocx** and **MSCOMM32.ocx** to C: \ WINDOWS \ System32
(Replace if file are already existing)

2. To Enter programming menu : Double click at “ **Arrow Down** ” icon




Sreen Display :

- 2.1 File - Select ' Exit ' to quit program
- 2.2 Load file - Load preset file from computer
- 2.3 Save file - Save setting program to computer
- 2.4 Transfer - Device to host : Read the setting program from AILLIGHT device (PTS-L)
- Send to Device : Save Setting program to AILLIGHT device (PTS-L)
- 2.5 Time - Set time

2.1
2.2
2.3
2.4
2.5

PRG	DAY	HR	MM	ON/OFF	BOX	CHANNEL							
1		00	00		00	8	7	6	5	4	3	2	1
2		00	00		00	8	7	6	5	4	3	2	1
3		00	00		00	8	7	6	5	4	3	2	1
4		00	00		00	8	7	6	5	4	3	2	1
5		00	00		00	8	7	6	5	4	3	2	1
6		00	00		00	8	7	6	5	4	3	2	1
7		00	00		00	8	7	6	5	4	3	2	1
8		00	00		00	8	7	6	5	4	3	2	1

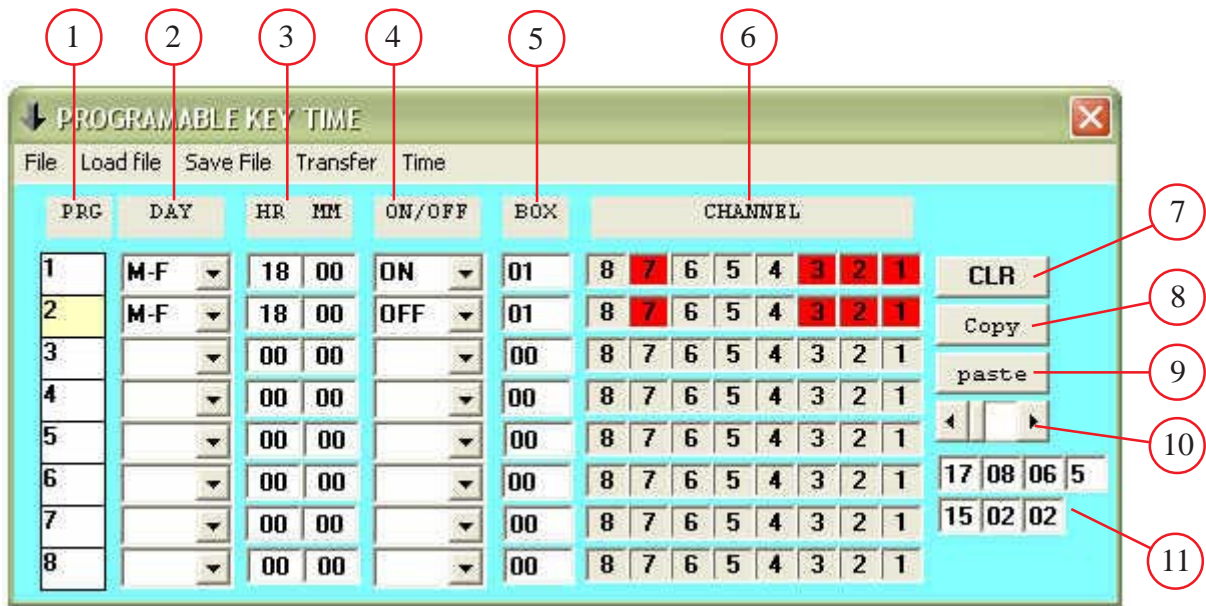

Programmable Timer Switch

- Can handle up to 64 programs

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. PRG 2. DAY 3. HR
MM 4. ON / OFF 5. BOX 6. CHANEL 7. CLR 8. COPY 9. PASTE 10. << >> 11. 15 : 02 : 02 | <ul style="list-style-type: none"> - The respective list of 64 programs - All = Every day - M - F = Monday - Friday - M - S = Monday - Satutday - SAT = Saturday - SUN = Sunday - Hour - Minute - To turn ON or turn OFF - Control Box ID (2 digit number) - Light circuit number (1 - 8) - Clear all preset program - To copy from one set program to another <i>For Example : Copy from Program 1 and paste to Program 2</i> - Paste copied program to selected program - Back / Next to a group of 8 programs - Clock |
|--|---|





Example of Setting Program

Program 1 : To turn ON Box 1, circuit 1,2,3,7 at 18:00 from Monday - Friday

PRG - Select 1
DAY - Select M - F (Monday - Friday)
HR : MM - 18.00
ON / OFF - Select ON
BOX - Select 01
CHANNEL - Select 1,2,3,7 (to be turned ON)

Program 2 : To turn OFF Box 1, circuit 1,2,3,7 at 07:00 from Monday - Friday

PRG - Select 2
DAY - Select M - F (Monday - Friday)
HR : MM - 07.00
ON / OFF - Select OFF
BOX - Select 01
CHANNEL - Select 1,2,3,7 (to be turned OFF)

- Click ' **Save file** ' to save program to computer
- Click ' **CLR** ' to clear all set program on the screen and
- Click ' **Transfer** ' → ' **Send to device** ' to clear all program in AiLIGHT device (**PTS-L**)

Programmable Timer Switch (LCD) : Manual

